

Shenzhen Gisantone Technology Co.,Ltd

No.30th, West Road of Shibi, Liulian, Pingdi town, Longgang

District, Shenzhen, China. 518117

Tell : 0086 0755 89390978 Fax : 0086 0755 89390979



Product Name 1710-2100MHz 16DBI Directional Outdoor Yagi Antenna

Model No. G13296B

- ✓ Outdoor Directional Yagi Antenna
- ✓ Frequency band 1710-2100MHz
- ✓ Gain 16DBI
- ✓ Horizontal/Vertical Beam width 55/50 degree
- ✓ N-female connector
- ✓ 30CM RG58/U cable



Shenzhen Gisantone Technology Co.,Ltd

No.30th, West Road of Shibi, Liulian, Pingdi town, Longgang
District, Shenzhen, China. 518117

Tell : 0086 0755 89390978 Fax : 0086 0755 89390979





Electrical Specifications	
Model No.	G13296B
Frequency Range	1710-2100MHz
Gain	16Dbi
VSWR	≤2.0
Input Impedance	50Ω
Polarization	Vertical & Horizontal
Front to Back Ratio	≥15dB
Horizontal Half Power Angle	55°
Vertical Half Power Angle	50°
Max Input Power	100W
Lightning Protection	DC Ground
Mechanical Specifications	
Connector Type	N-female
Cable Type	RG58/U
Cable Length	30CM
Working Temperature	-40°C ~ + 65°C
Antenna Weight	300g
Pole Diameter	Φ35~Φ55mm
Size	893*105*45mm
Rated Wind Velocity	210km/h
Radiating Element	19
Package Size	92*30*37CM / 50PCS
Weight	20.5KG


Specifications may change without notice. Contact us by sales@gisantone.com for any inquiries.

Shenzhen Gisantone Technology Co.,Ltd

No.30th, West Road of Shibi, Liulian, Pingdi town, Longgang District, Shenzhen, China. 518117

Tell : 0086 0755 89390978 Fax : 0086 0755 89390979

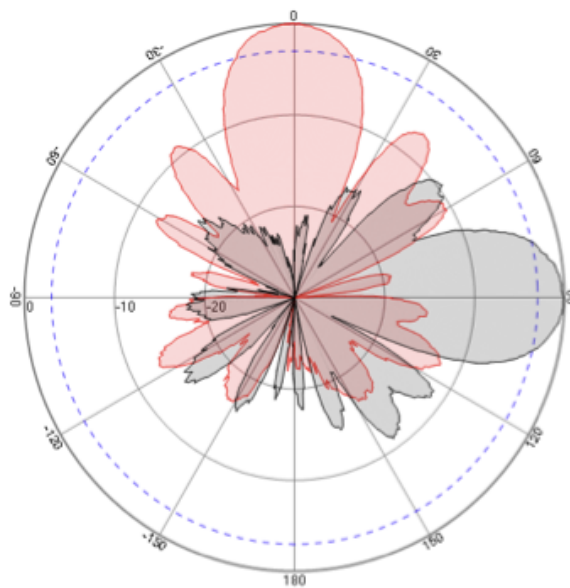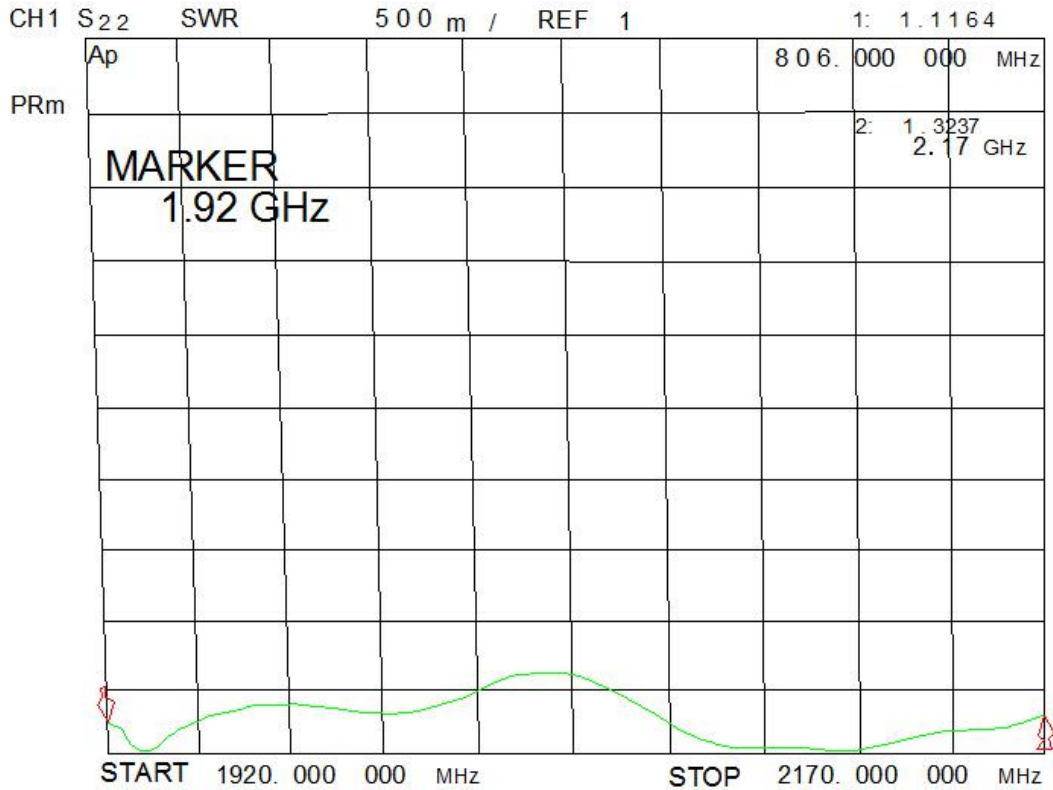

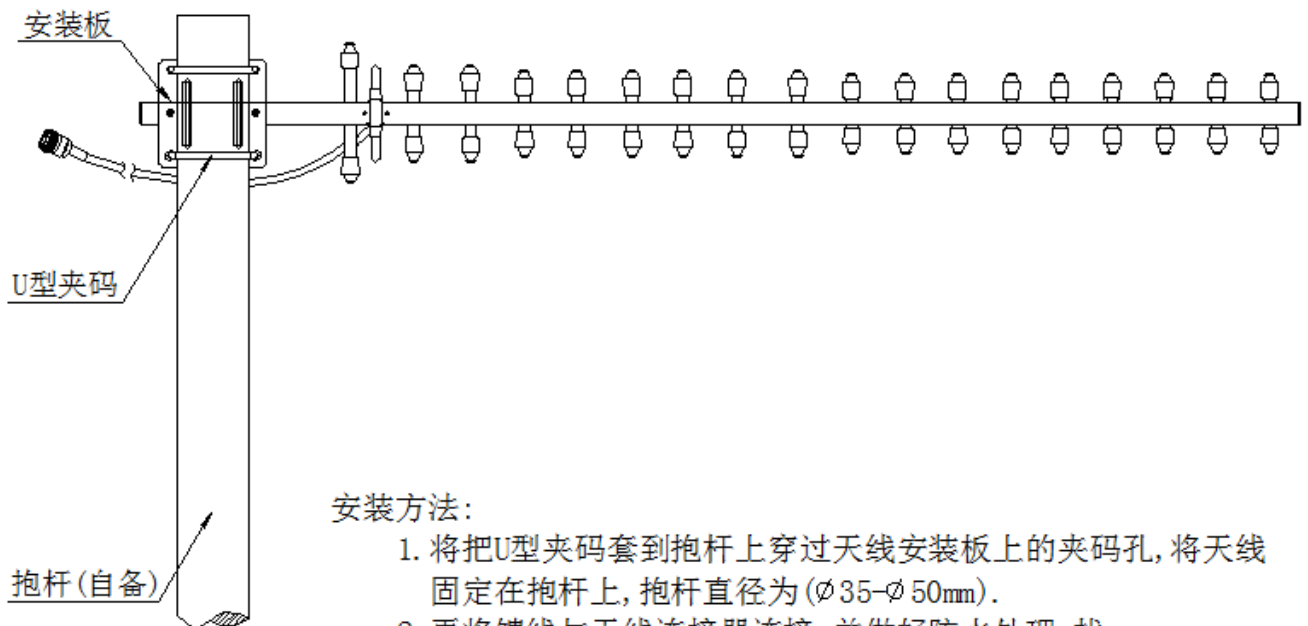

安装方法:

1. 将把U型夹码套到抱杆上穿过天线安装板上的夹码孔, 将天线固定在抱杆上, 抱杆直径为($\varnothing 35-\varnothing 50\text{mm}$).
2. 再将馈线与天线连接器连接; 并做好防水处理. 找到天线接收信号最佳方位, 紧固螺母;